



WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED

[www.superfix.co.in](http://www.superfix.co.in)



## Block Fix

### Description

Ready to use grey cement based non-shrink, self-curing mortar for fixing AAC blocks, Concrete blocks, fly ash bricks etc.

### Colour

Gray

### Uses

Fixing and Jointing masonry units like AAC blocks, Concrete blocks, fly ash bricks etc.

### Characteristics / Advantages

- Ready to use, only water to be added. Thinner jointing material with very high tensile adhesion strength improving the overall masonry strength.
- Better bond than conventional cement based mortar
- Faster to apply due to good spreadable properties.
- Excellent high strength & water retention properties Economical as quantity of mortar is less than conventional mortar Self-curing.

### Mixing

Water: Powder = 0.22 to 0.24 by weight (6.6l to 7.2 l water per 20 kg bag). Mixing Time : 3 minutes minimum



WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED

[www.superfix.co.in](http://www.superfix.co.in)

## COMPANY PROFILE

Super Fix Tile Adhesive is a leading manufacturer and supplier of high-performance tile adhesives designed for a variety of tiling applications. Our products are formulated using special polymer additives and a cement-based formula, ensuring that each adhesive provides the best possible performance for both residential and commercial projects. Our commitment to quality and innovation has made us a trusted name in the industry, providing our customers with long-lasting and durable solutions for all their tiling needs.

At Super Fix Tile Adhesive, we understand the importance of reliable bonding for tiles. Our adhesives are designed to create strong, enduring bonds that resist wear and tear, even in high-traffic or demanding environments. The addition of premium polymer additives enhances the adhesive's flexibility, improving its ability to withstand thermal expansion, contraction, and vibration. This makes our adhesives the ideal choice for both interior and exterior installations, ensuring that your tiles stay securely in place for years to come.

We take pride in offering the highest quality products that are tested to meet the most rigorous industry standards. Every batch of Super Fix Tile Adhesive undergoes strict quality control processes to ensure superior performance and consistency. Whether you are installing ceramic, porcelain, marble, or natural stone tiles, our adhesive provides an easy application process and a smooth finish, making it the perfect solution for professionals and DIY enthusiasts alike.

Our focus on customer satisfaction drives us to continuously innovate and improve our products. Super Fix Tile Adhesive is committed to sustainability, ensuring that our manufacturing processes are environmentally responsible. We aim to provide our customers with not only the best adhesive solutions but also peace of mind, knowing they are using a product that is both high-quality and environmentally friendly. Choose Super Fix Tile Adhesive for reliable, durable, and long-lasting tile installations.

### Our Factory in World



Produced by:

**KESHJI INTERNATIONAL PVT LTD**

Plot No. 112, Kuvadava GIDC, Rajkot - 360023 (Gujarat) INDIA.  
[www.superfix.co.in](http://www.superfix.co.in) | [info@superfix.co.in](mailto:info@superfix.co.in)



Authorised Dealer & Distributor

TRUEDesign®



**SUPERFIX**™  
TILE  
ADHESIVE

WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED



[www.superfix.co.in](http://www.superfix.co.in)

Superior  
Quality

Durable  
Joints

Strength  
For Life



WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED

[www.superfix.co.in](http://www.superfix.co.in)



## Silver-02

### Features/Benefits

- Signal Component, Just add Water.
- Interior Application, Polymer Based
- Easy to use & Economical
- Can Be used up to Maximum 12mm Bed Thickness
- Complies with IS 15477:2019 - Type 1T Adhesive Standards.
- Complies With A118.1T Shear Bond Strength Requirements.
- Complies With EN / ISO with C1T Classification

### Colour

Gray

### Suitable Substrate

- Concrete
- Concrete Masonry
- Cement Mortar Beds
- Cement Plaster- Brick Masonry
- Cement Terrazzo
- Ceramic Tile\*
- Exiting Natural Stone\*
- \*Surface to be cleaned and roughened before installation of tiles or stones

### Application


Designed especially for dry areas of interior floor and interior wall installations of all types of ceramic tile, semi-vitreous tile, precast terrazzo and small format natural stones over concrete and on a variety of cement-based substrates.

### Working Properties (21° C)

Silver Adhesive Mixed With Water.

Open Time	20 Minutes
Adjustability Time	20 Minutes
Pot Life	4 Hours
Time to Heavy Traffic	24 Hours

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

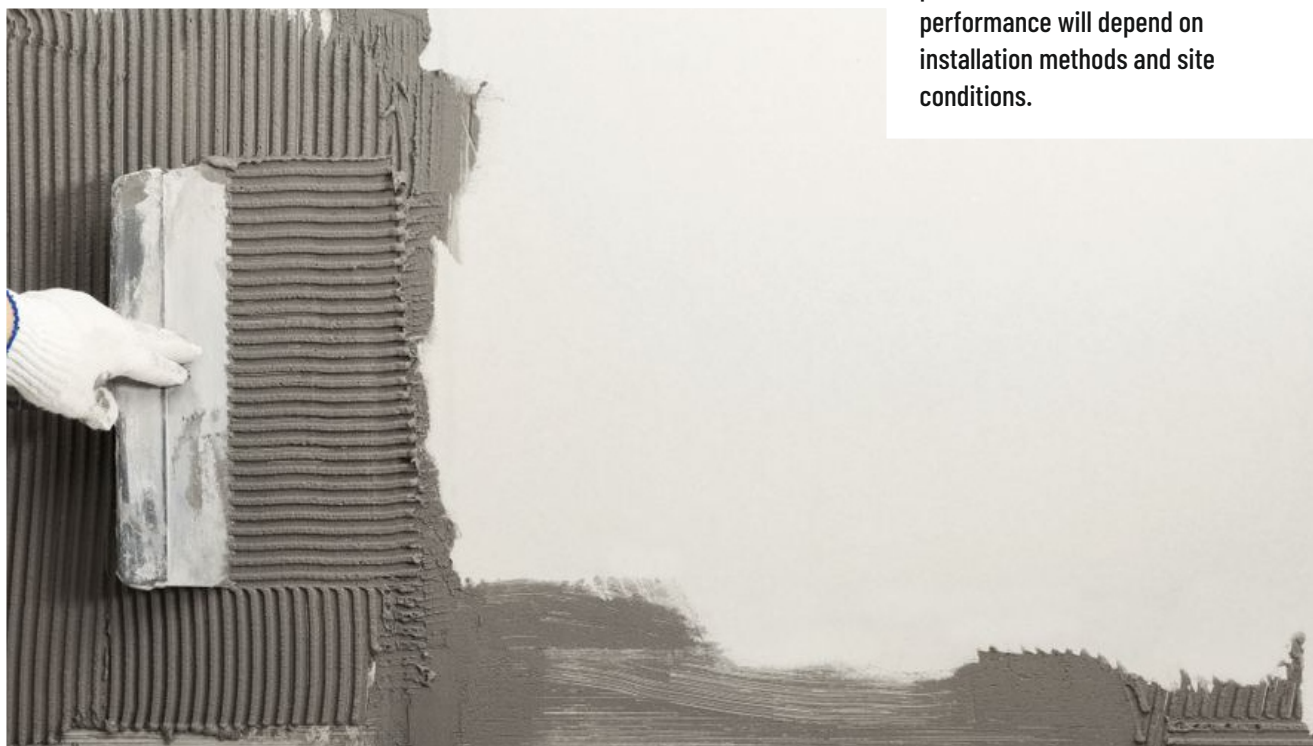

WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED

[www.superfix.co.in](http://www.superfix.co.in)



## Gold - 03

### Features/Benefits

- Signal Component, Just add Water.
- Interior Application, Tile on Tile Application
- Easy to use & Economical
- Bond to Various Substrate
- Complies with IS 15477:2019 - Type 2T Adhesive Standards.
- Complies With A118.1T Shear Bond Strength Requirements.
- Complies With EN / ISO with C2T Classification

### Colour

Gray

### Suitable Substrate

- Concrete
- Concrete Masonry
- Cement Mortar Beds
- Cement Plaster
- Exiting Vitrified Tiles
- Brick Masonry
- Cement Terrazzo
- Ceramic Tile\*
- Exiting Natural Stone\*
- \*Surface to be cleaned and roughened before installation of tiles or stones

### Application

Designed especially for interior floor and wall installations and external floor installations of all types of ceramic tile, vitrified tile, precast terrazzo and natural stones over concrete and on a variety of cement-based substrates. Can be used up to a maximum 12mm bed thickness

### Working Properties (21° C)

Gold Adhesive High Polymer Adhesive Mixed with Water.

Open Time	20 Minutes
Adjustability Time	20 Minutes
Pot Life	4 Hours
Time to Heavy Traffic	24 Hours

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.



WITH SPECIAL POLYMER  
ADDITIVES AND CEMENT BASED

[www.superfix.co.in](http://www.superfix.co.in)



## Platinum - 04

### Features/Benefits

- Signal Component, Just add Water.
- Easy to use & Economical
- High Strength with Various Substrate
- Water & Shock Resistance
- Complies with IS 15477:2019 - Type 3T Adhesive Standards.
- High Open Time
- High Adjustability Time

### Colour

White & Gray

### Suitable Substrate

- Cement Mortar Beds
- Cement Plaster
- Brick Masonry Surface
- Concrete Surfaces
- Cement Terrazzo
- Quarry, Cement Body Tiles
- Slim Porcelain large format tiles
- Cement & Concrete Masonry
- Trimix / VDF Concrete
- Ceramic Tile, Vitrified Tile and Natural Stone
- Cement Backer Board\*\*\*

### Application

Design Especially for Interior and Exterior Floor and Wall Installations of all types of ceramic tile vitreous/vitrified, semi-vitreous tile, glass mosaic tiles, precast terrazzo, and natural stones over concrete and on a variety of substrates. Good underwater shear bond allows this product to be used for wet areas like swimming pools, sauna, water bodies and washrooms. Can also be used as slurry bond adhesive in wet on wet application tile on tile application.

### Working Properties (21° C)

Platinum High Polymer Adhesive Mixed with Water.

Open Time	25 Minutes
Adjustability Time	25 Minutes
Pot Life	4 Hours
Time to Heavy Traffic	24 Hours

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

